

MULTIFLO[®]
Feed Delivery Systems

Made to Work. Built to Last.[™]



Get worry-free performance in feed conveying

Closed-loop auger system for gentle feed handling

Chore-Time's MULTIFLO® Feed Delivery System has a reputation for gentle handling of feed and feed pellets for hog gestation, farrowing and nursery units as well as for dairy feeding chores. This innovative closed-loop coreless auger system uses the same long-lasting high-tensile strength steel auger as Chore-Time's famous FLEX-AUGER® Conveying System. However, instead of rotating the auger, the MULTIFLO System simply slides the auger within the tube. Reliable and simple to manage, the MULTIFLO System also eliminates corner wheels and high-maintenance parts some other recirculating systems require.

Product Features and Advantages

- The MULTIFLO® System is the most reliable, long-lasting, closed-loop auger system you can get with a limited 5-year warranty on the elbows and auger. In addition to our Standard MULTIFLO System, you can choose:
 - A High-Speed MULTIFLO System for delivering up to 50 pounds (20 kg) of feed per minute.
 - A Tight-Radius MULTIFLO System for use in farrowing rooms and other tight spaces where sharp 180-degree turns for 36-inch (914 mm) wide aisles are desired.
- MULTIFLO Systems can serve buildings of nearly any length and arrangement of animals.
- PVC auger tube makes it easy to drill holes for feeders wherever needed along the tube.
- Chore-Time's MULTIFLO Systems are designed to accurately distribute feed and to contribute to optimum conversion.

- The MULTIFLO Auger installs easily and requires no tensioning maintenance. With Chore-Time's MULTIFLO System, retrieving cables or chains for repair or replacement can be a thing of the past.
- Easy-to-use auger connector makes quick work of installing the auger loop.
- For convenience and added durability in making turns, the MULTIFLO System's elbows are pre-formed from hardened steel.
- The energy-efficient direct drive power unit for the MULTIFLO System attaches to any straight section of auger tubing.
- Each MULTIFLO System includes a transparent auger tube section to provide an easy visual check of auger and feed.

Warranty and Service

Chore-Time's MULTIFLO® Systems are backed by a generous warranty and by a worldwide network of trained technical service and distributor professionals.

For the distributor nearest you, call the Chore-Time Customer Service Department at 574-658-4101.



MULTIFLO® Drive Gear



Farrowing Drop Feeder




Chore-Time Sow Feeder



SENSOR PLUS™ Feed Level Controls



MULTIFLO® Inspection Window

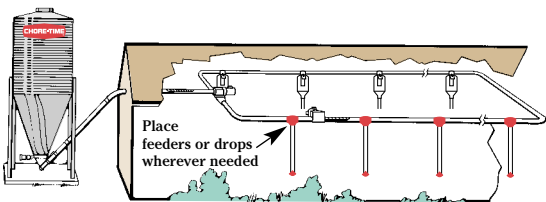

MULTIFLO® Feed Delivery System for farrowing or gestation

Chore-Time MULTIFLO® Systems Available

Feed Delivery System	Tube Outside Diameter	Corner Radius	Maximum Length	Motor Size Recommended at Maximum Length	Feed Delivery Rate	Typical Applications
	inch/mm	inch/mm	feet/meters	HP	lb/min.-kg/min.	
Standard MULTIFLO®	2.25 in. 55 mm	24 in. 610 mm	1080 ft. 330 m (with 4 elbows)	(3) 1/2	15-20 lbs. 7-9 kg	Multiple corners for hog or other operations
Tight-Radius MULTIFLO®	2.25 in. 55 mm	180° turn 39 in. 990 mm (loop width)	1080 ft. 330 m (with 2 elbows)	(3) 1/2	15-20 lbs. 7-9 kg	Sharp, 180° turns for hog farrowing rooms with 36-in. (914-mm) wide aisles
High-Speed MULTIFLO®	2.25 in. 55 mm	24 in. 610 mm	1080 ft. 330 m (with 4 elbows)	(3) 3/4	50 lbs. 20 kg	Multiple corners, high feed volume for hog or other operations

Feed delivery rate is calculated at a standard of 40 pounds of feed per cubic foot (640 kilograms per cubic meter) at 348 RPM.



Chore-Time Poultry Production Systems · A Division of CTB, Inc.
 P.O. Box 2000 · Milford, Indiana 46542-2000 · Phone 574-658-4101 · Fax 574-658-4171
 E-Mail Address: poultry@choretime.com · Internet: www.choretime.com · NASDAQ: CTBC